




TLS24NI Linear Series

FAMILY DATASHEET



Product Code	LL24NI-CRO60L06
Description	Linear Lighting
Degree (FWHM)	66°
Efficiency	94%
Туре	24 in 1
Size (mm) W x L x H	22X220X9.4
Material	PMMA
Fastening	Hooks
Box Size (mm) WxLxH	325x245x37
Box Quantity	
Box Weight (g)	
Rohs Complaint	Yes
Operating Temerature	-25 ° C ~ + 85 ° C max
Storage Temperature	0 ° C ~ 40 ° C max

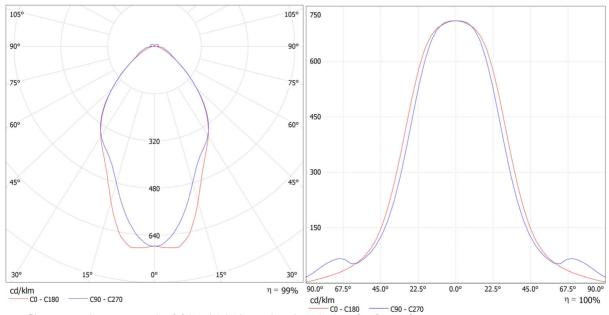

- Please use a litter water and soft fabric (air-laid paper) to clean the lens & reflector if necessary.
- Forbid to use industrial solvent to clean the lens, such as alcohol.
- The working temperature is -25 $C^{\sim}+80$ C.
- Storage environment temperature is 0/C~40/C,humidity is 30%~95%.
- Optic Lens has the function to change the ray of light, it is made of optical material, the effect shall be influenced once pollute.
 Please do not open the packing before use it,to avoid the dust pollution.
- Protect the product from the sun and other ultraviolet ray, as these will lead to aging, change color, crack, etc.
- Please ware gloves once install the lens, avoid to abrasion the lens surface.
- Forbid to use acidic or alkaline solution touch the product, avoid to generate the chemical reactions.

PMMA

Hooks

325x245x37

-25 ° C ~ + 80 ° C max

0 ° C \sim 40 ° C max

Material Fastening

Box Quantity

Box Weight (g)

Rohs Complaint

Operating Temerature

Box Size (mm) WxLxH

Storage Temperature

 Product Code
 LL24NI-CRO60L06

 Description
 Linear Lighting

 Degree (FWHM)
 75°

 Efficiency
 94%

 Type
 24 in 1


 Size (mm) WxLxH
 22X220X9.4

105°		105° 600		
90°		90° 500		
75°	200	75° 400		
60°	300	300		
45°	400	45° 200		
	600	100		
30° 15	° 0° 15°	30°		
cd/klm C0 - C180	C90 - C270	$\eta = 98\% \begin{array}{r} \hline 90.0^{\circ} & 67.5^{\circ} \\ \hline cd/klm \end{array}$	45.0° 22.5° 0.0°	22.5° 45.0° 67.5° 90.0° $\eta = 98\%$


- Please use a litter water and soft fabric (air-laid paper) to clean the lens & reflector if necessary.
- Forbid to use industrial solvent to clean the lens, such as alcohol.
- The working temperature is -25/C"+80/C.
- Storage environment temperature is 0/C~40/C,humidity is 30%~95%.
- Optic Lens has the function to change the ray of light, it is made of optical material, the effect shall be influenced once pollute.
 Please do not open the packing before use it,to avoid the dust pollution.
- Protect the product from the sun and other ultraviolet ray, as these will lead to aging, change color, crack, etc.
- Please ware gloves once install the lens, avoid to abrasion the lens surface.
- · Forbid to use acidic or alkaline solution touch the product, avoid to generate the chemical reactions.




Product Code	LL24NI-CRO90L06
Description	Linear Lighting
Degree (FWHM)	93°
Efficiency	92%
Туре	24 in 1
Size (mm) WxLxH	22X220X9.4
Material	PMMA
Fastening	Hooks
Box Size (mm) WxLxH	325x245x37
Box Quantity	
Box Weight (g)	
Rohs Complaint	Yes
Operating Temerature	-25 ° C ~ +80 ° C max
Storage Temperature	0 ° C ~ + 40 ° C max

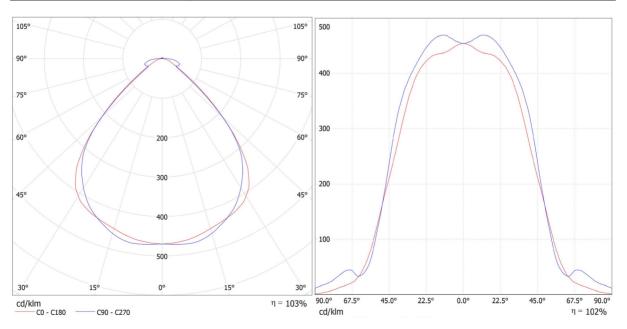


- Please use a litter water and soft fabric (air-laid paper) to clean the lens & reflector if necessary.
- Forbid to use industrial solvent to clean the lens, such as alcohol.
- The working temperature is -25 $\[C^{\sim}+80\]$ C.
- Storage environment temperature is 0/C~40/C,humidity is 30%~95%.
- Optic Lens has the function to change the ray of light, it is made of optical material, the effect shall be influenced once pollute.
 Please do not open the packing before use it,to avoid the dust pollution.
- Protect the product from the sun and other ultraviolet ray, as these will lead to aging, change color, crack, etc.
- Please ware gloves once install the lens, avoid to abrasion the lens surface.
- Forbid to use acidic or alkaline solution touch the product, avoid to generate the chemical reactions.

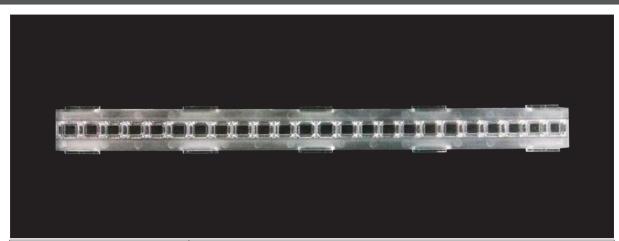

Product Code	LL24NI-CRO90L06
Description	Linear Lighting
Degree (FWHM)	94°
Efficiency	93%
Туре	24 in 1
Size (mm) WxLxH	22X220X9.4
Material	PMMA
Fastening	Hooks
Box Size (mm) WxLxH	325x245x37
Box Quantity	
Box Weight (g)	
Rohs Complaint	Yes
Operating Temerature	-25 ° C ~ +80 ° C max
Storage Temperature	0 ° C ~ + 40 ° C max

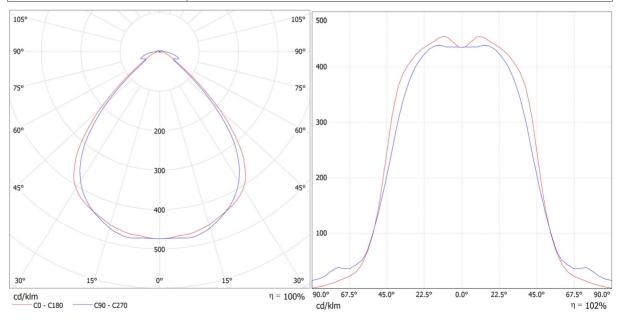

- Please use a litter water and soft fabric (air-laid paper) to clean the lens & reflector if necessary.
- Forbid to use industrial solvent to clean the lens, such as alcohol.
- The working temperature is -25 \int C^++80 \int C.
- Storage environment temperature is 0/C~40/C, humidity is 30%~95%.
- Optic Lens has the function to change the ray of light, it is made of optical material, the effect shall be influenced once pollute. Please do not open the packing before use it, to avoid the dust pollution.
- Protect the product from the sun and other ultraviolet ray, as these will lead to aging, change color, crack, etc.
- Please ware gloves once install the lens, avoid to abrasion the lens surface.
- Forbid to use acidic or alkaline solution touch the product, avoid to generate the chemical reactions.

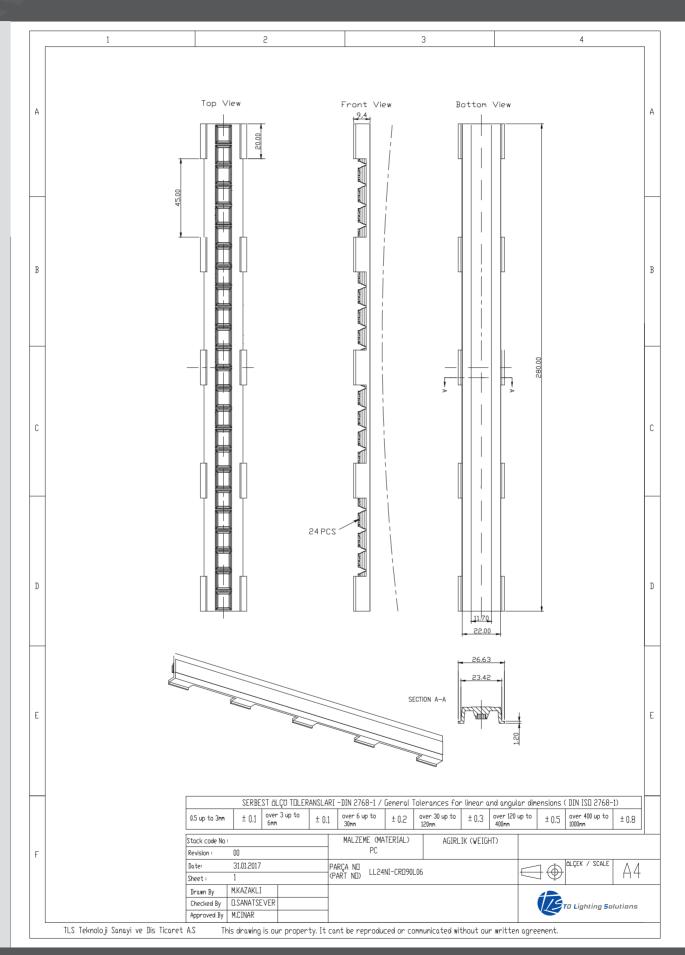

MECHANICAL DRAWINGS

LEGAL NOTICE

Product information provided by TLS Teknoloji Sistemleri San ve Dış Tic AŞ ("TLS") in this document is believed to be correct and accurate. TLS reserves the right to change/correct the specifications and other data or information relating to products without notice but TLS accepts no liability for errors that may appear in this document, howsoever occurring, or liability arising from the use or application of any information or data provided herein. Neither the supply of such information, nor the purchase or use of products conveys any licence or permission under patent, copyright, trademark or other intellectual property right of TLS or third parties.

Products sold by TLS are subject to its standard Terms and Conditions of Sale that are available on request. No warranty is given that products do not infringe the intellectual property rights of third parties, and furthermore, the use of products in certain ways or in combination with TLS, or non-TLS furnished equipments/components may infringe intellectual property rights of TLS.

The purpose of this document is to provide information only and it may not be used, applied or reproduced (in whole or in part) for any purpose nor be taken as a representation relating to the products in question. No warranty or guarantee express or implied is made concerning the capability, performance or suitability of any product, and information concerning possible applications or methods of use is provided for guidance only and not as a recommendation. The user is solely responsible for determining the performance and suitability of the product in any application and checking that any specification or data it seeks to rely on has not been superseded.

Products are intended for normal commercial applications. For applications requiring unusual environmental requirements, extended temperature range, or high reliability capability (e.g. military, or medical applications), special processing/testing/conditions of sale may be available on application to TLS.

CONTACT

TLS Teknoloji Sistemleri San ve Dıs Tic AŞ

Akçaburgaz Mahallesi 3080. Sokak No:5 Esenyurt / İstanbul / TURKEY

info@tlsteknoloji.com +90 444 27 33